

# 8'-0" x 14'-0" TRAFFIC VISTA SWITCH VAULT x 9'-4" DEEP

**NOTES:**

- VAULT DESIGNED IN ACCORDANCE WITH AASHTO H-20-44 TRAFFIC BRIDGE LOADING USING 5,500 PSI [37.92MPa] COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI [413.2MPa] YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS. #31008.
  - VAULT TO BE PLACED ON A MIN. 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.
  - INTERIOR WALLS AND CEILING SHALL BE PAINTED WITH TWO COATS WHITE PAINT. (FRAZEE #410 LATEX OR APPROVED EQUAL).
  - ALL JOINTS SHALL BE GASKETED WATERTIGHT.
- THE FOLLOWING TO BE INSTALLED WITH VAULT:
- o) 1 5/8" x 1 5/8" GALV. BOLT ON UNISTRUT x 48" LONG. (24 REQ'D.). (#21-48-4H) W/ 1/2" DIA. ROUNDHEAD BOLT & WASHER (72 REQ'D.).


**ORDERING INFORMATION:**

K814-FV112-16VS FOR ASSEMBLY AS SHOWN.  
 PER CITY OF ANAHEIM SPEC. CU 1600-33  
 TOTAL WEIGHT OF ASSEMBLY AS SHOWN IS 66,870 Lbs.

1. UV814-B56-16VS, 56" BOTTOM SECTION (CG-814-B56-16VS), WT. 34,560 lbs.
2. UV814-156-162, 56" TOP SECTION (CG-814-156-162 (50)), WT. 32,310 lbs.
3. 13" x 14" DIA. SUMP x 5" DEEP (5000-247), W/GRATE RECESS TO ACCOMMODATE SUMP COVER (08-2102), BOTTOM SECTION (2) CORE MTD.
4. 10" DIA. PLASTIC VENT COUPLING (55-30-80), TOP SECTION (6) CORE MTD.
5. 6" DIA. TERMS, BOTTOM SECTION (32) SHELL MTD.; TOP SECTION (64) SHELL MTD.
6. 1" DIA. PVC GROUND WIRE SLEEVE, TOP SECTION (8) CORE MTD.
7. 1" DIA. x 6" DOUBLE COIL INSERT, GALV., 10,000 LB. PULL CAPACITY, TOP SECTION (9) CORE MTD.; BOTTOM SECTION (8) CORE MTD.
8. 1/2" PLASTIC INSERTS, BOTTOM SECTION (36) CORE MTD.; TOP SECTION (36) CORE MTD.
9. 5/8" x 3 3/8" NC THREADED INSERT, 2000 LB LOAD CAPACITY, TOP SECTION (6) CORE MTD.
10. 1/2" DIA. BRONZE GROUND INSERT, GROUND TO REINFORCEMENT BARS, BOTTOM SECTION (2) CORE MTD.; TOP SECTION (2) CORE MTD.
11. 5/8" DIA. COPPER GLAD GROUND ROD, WELD TO REINFORCEMENT & PROJECT 3" MIN., BOTTOM SECTION (2) CORE MTD.
14. 16" x 36" KNOCKOUT x 5" DEEP, 1" DRAFT TYP, TOP SECTION (1) CORE MTD.
15. 1" DIA. GALV. COIL INSERT, TOP SECTION (7) CORE MTD.

**GENERAL NOTES:**

1. Minimum soil bearing capacity is hereby assumed to be 2000 PSF unless otherwise documented by a geotechnical report that shall be provided to Jensen Precast by the end user. Jensen Precast shall not be held responsible for the soil bearing capacity. Installation of Manholes, Vaults, Handholes, Meter Boxes, etc. will be as per Jensen installation procedures.
2. Structural modification to the Jensen line of products is not permitted without prior written approval from Jensen Engineering Department.
3. Do not scale the drawings, verify all dimensions including rough openings, if any discrepancies are found, notify the Jensen Engineer immediately.
4. The Jensen Engineer will interpret the intent of the drawings in case of possible conflict or discrepancy.
5. Dimensional Tolerances - The length, width, height, or dia. measurements of the structure when measured on the inside surfaces shall not deviate from design dimensions by more than the following:  
 Tolerance:  
 0 to 5 Feet 1/4"  
 5 to 10 Feet 3/8"  
 10 to 20 Feet as agreed upon between the supplier and purchaser.  
 Squaresness Tolerance:  
 The inside of the precast concrete component shall be square as determined by diagonal measurements. The difference between such measurements shall not exceed the following:  
 Measured Length: Allowable Difference  
 0 to 10 Feet 1/2"  
 10 to 20 Feet 3/4"  
 20 Feet and over as agreed upon between the supplier and purchaser.

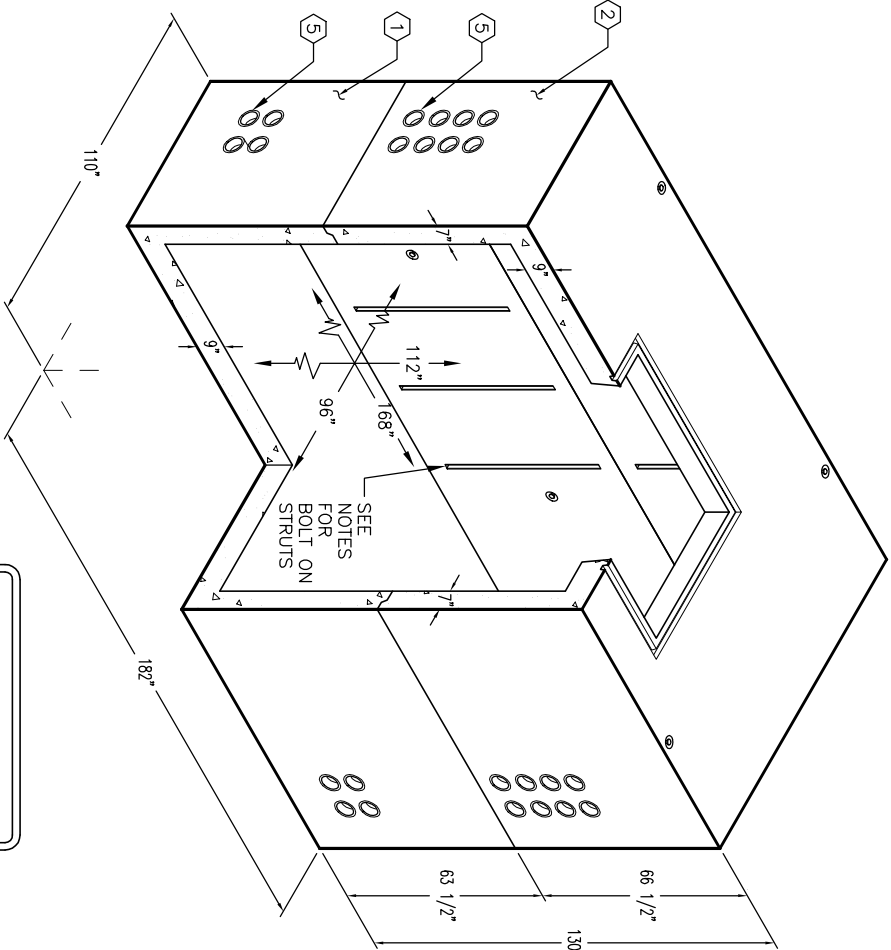


MINIMUM EXCAVATION SIZE:  
 10'-2" x 16'-2" x DEPTH REQ'D.




AUTOCAD 2000

**K814-FV112-16VS**  
 PER CITY OF ANAHEIM SPEC. CU 1600-33


12-05-05

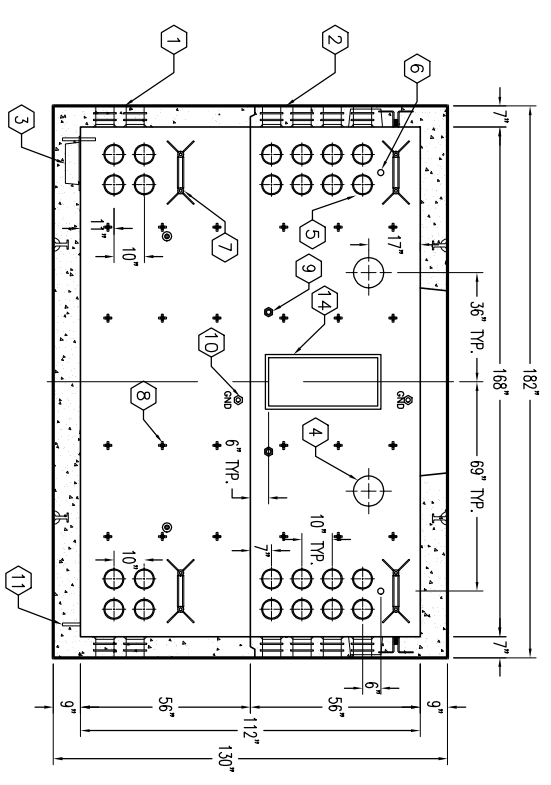


**SECTION A-A**

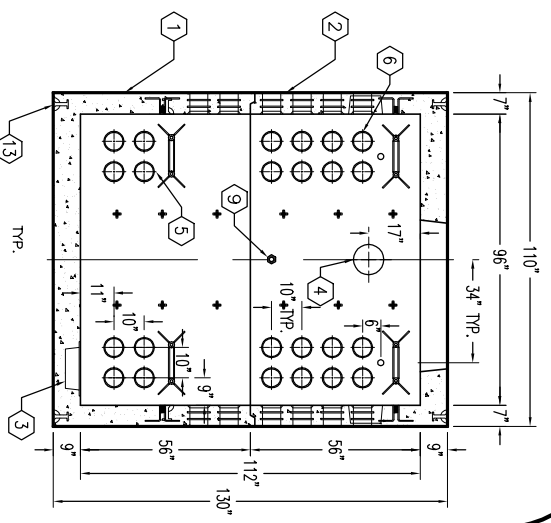


**SECTION B-B**

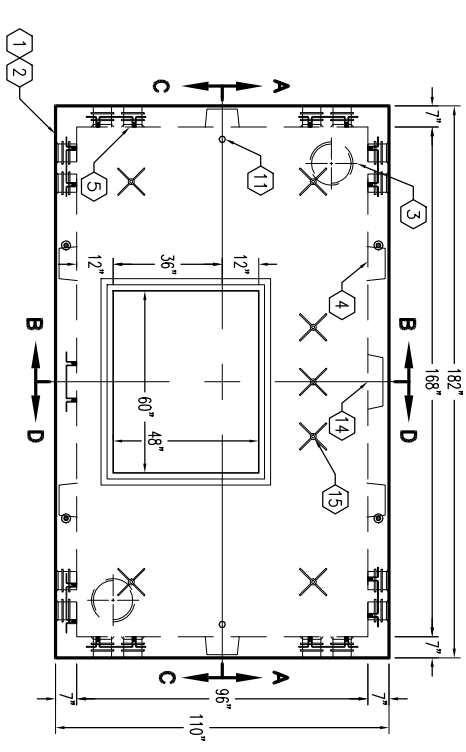

**PLAN VIEW**

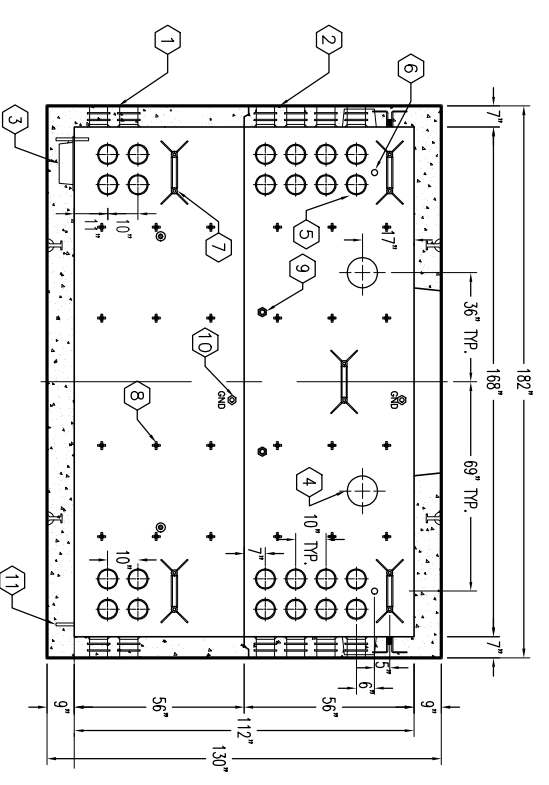

**SECTION C-C**

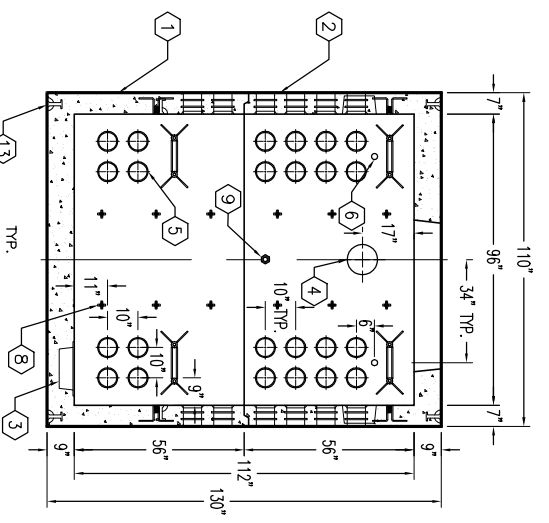

**SECTION D-D**



| # | DATE    | DESCRIPTION                                 | BY |
|---|---------|---|----|
| A | 1/23/06 | MOVED BOTTOM TERMS ADDED BOTTOM DBL INSERTS | BB |

**K814-FV112-16VS**  
 PER CITY OF ANAHEIM SPEC. CU 1600-33

12-05-05