


# 750 - 1,500 GALLON HOLDING TANKS TRAFFIC RATED

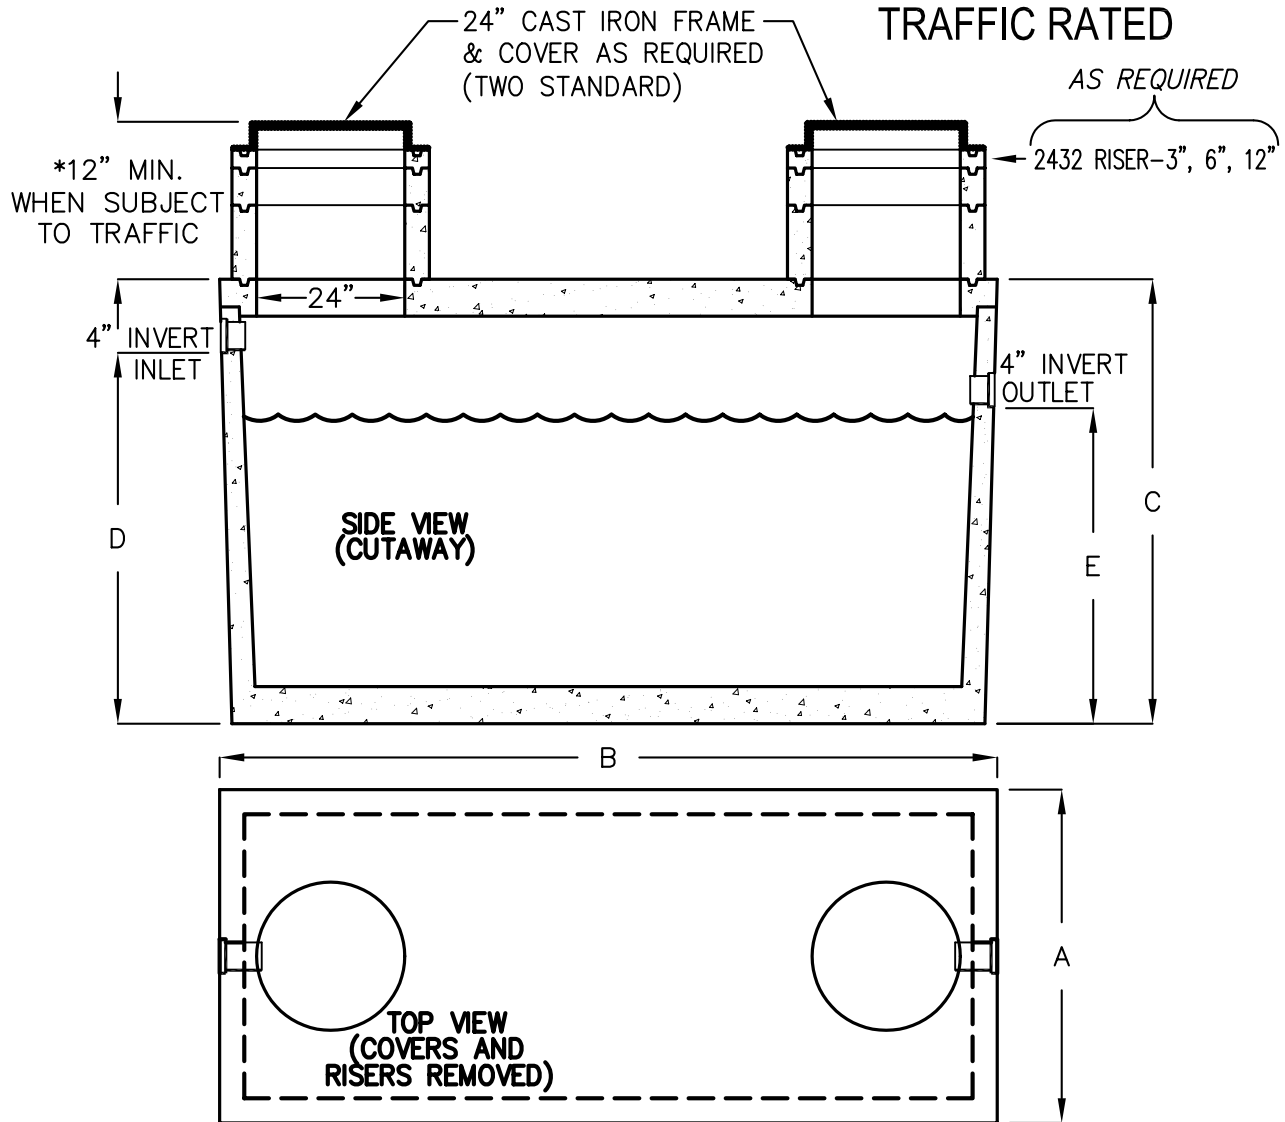

**NOTE:** NOT RECOMMENDED FOR POTABLE WATER OR ABOVE GROUND USE.  
NO WARRANTIES EXPRESSED OR IMPLIED FOR MERCHANTABILITY OR  
FITNESS FOR ANY PARTICULAR PURPOSE.

MODEL NUMBER	LIQUID CAPACITY GALLONS	TOTAL TANK VOLUME	WIDTH "A"	OVERALL LENGTH "B"	TANK HEIGHT "C"	INLET "D"	OUTLET "E"	MINIMUM EXCAVATION WIDTH	MINIMUM EXCAVATION LENGTH	*DEPTH OF BURY	TANK WEIGHT LBS.
HP-750	750	924	4'-0"	8'-1"	6'-0"	5'-0"	4'-9"	5'-0"	9'-1"	6' MAX.	9,000
HP-1000	1000	1240	5'-1"	8'-2"	6'-0"	5'-0"	4'-9"	6'-1"	9'-2"	6' MAX.	11,000
HP-1200	1200	1485	5'-9"	8'-6"	6'-0"	5'-0"	4'-9"	6'-9"	9'-6"	6' MAX.	12,600
HP-1500	1500	1870	5'-7"	10'-8"	6'-0"	5'-0"	4'-9"	6'-7"	11'-8"	6' MAX.	14,900

LARGER SIZES AVAILABLE UPON REQUEST, CONTACT JENSEN PRECAST FOR DETAILS.

- TANK DESIGNED FOR H-20 TRAFFIC WHEEL LOAD WITH DRY SOIL CONDITIONS (WATER TABLE BELOW TANK).
- SUITABLE NATIVE OR SUB-BASE SHALL BE PREPARED TO HANDLE ANTICIPATED LOADS. THE EXCAVATION SHALL BE BEDDED WITH SUITABLE GRANULAR MATERIAL AND SHALL BE COMPACTED TO 90% MAXIMUM DRY DENSITY, OR TO REQUIREMENTS OF THE PROJECT GEOTECHNICAL ENGINEER.
- FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.