
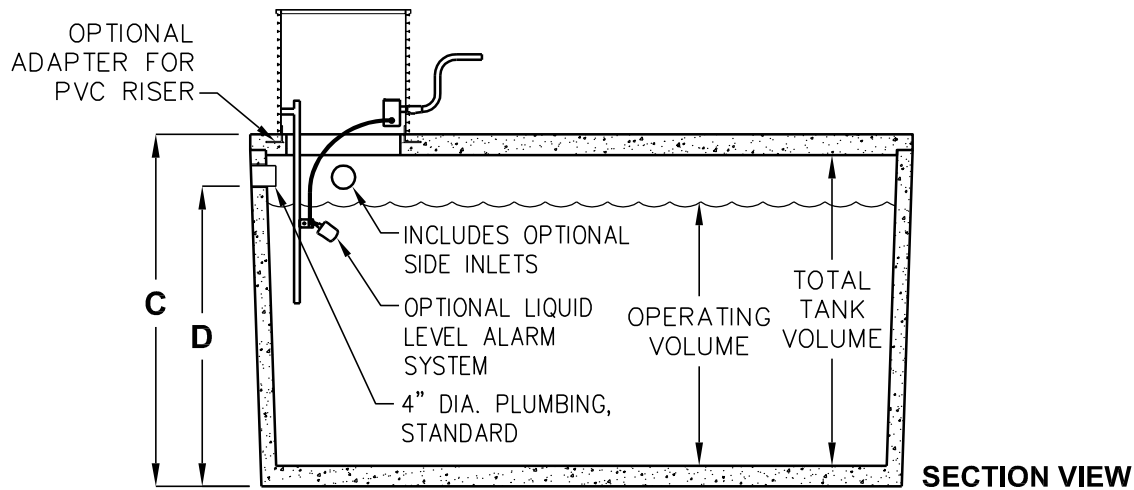


# 750-3000 GALLON HOLDING TANKS

NON-TRAFFIC RATED

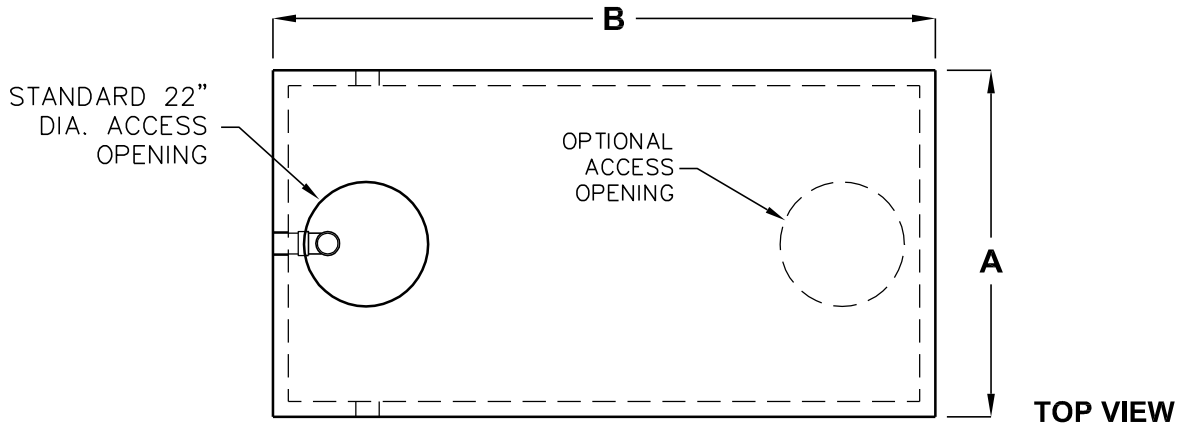

MODEL NUMBER	OPERATING VOLUME (GALLONS)	TOTAL VOLUME (GALLONS)	DIM A	DIM B	DIM C	DIM D	MINIMUM EXCAVATION WIDTH	MINIMUM EXCAVATION LENGTH	DEPTH OF BURY
HS-750	750	924	4'-0"	8'-1"	5'-8"	4'-10"	5'-0"	9'-1"	1' TO 3'
HS-1000	1000	1240	5'-1"	8'-2"	5'-8"	4'-10"	6'-1"	9'-2"	1' TO 3'
HS-1200	1200	1485	5'-9"	8'-6"	5'-8"	4'-10"	6'-9"	9'-6"	1' TO 3'
HS-1500	1500	1870	5'-7"	10'-8"	5'-8"	4'-10"	6'-7"	11'-8"	1' TO 3'
HS-2000	2000	2424	4'-11"	15'-11"	5'-8"	4'-10"	5'-11"	16'-11"	1' TO 3'
HS-2500	2500	3066	5'-9"	16'-10"	5'-8"	4'-10"	6'-9"	17'-10"	1' TO 3'
HS-3000	3000	3526	5'-9"	16'-10"	6'-5"	5'-7"	6'-9"	17'-10"	1' TO 3'

NOT RECOMMENDED FOR POTABLE WATER OR ABOVE GROUND USE.

DESIGN LOAD: NON-TRAFFIC WITH DRY SOIL CONDITIONS (WATER LEVEL BELOW TANK.)

SUITABLE SUB-BASE BEDDED WITH GRANULAR MATERIAL SHALL BE PREPARED TO HANDLE ANTICIPATED LOADS.

FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.