


# 15", 18", 24", 30" DIAMETER REINFORCED CONCRETE PIPE

## PROFILE GASKET JOINT

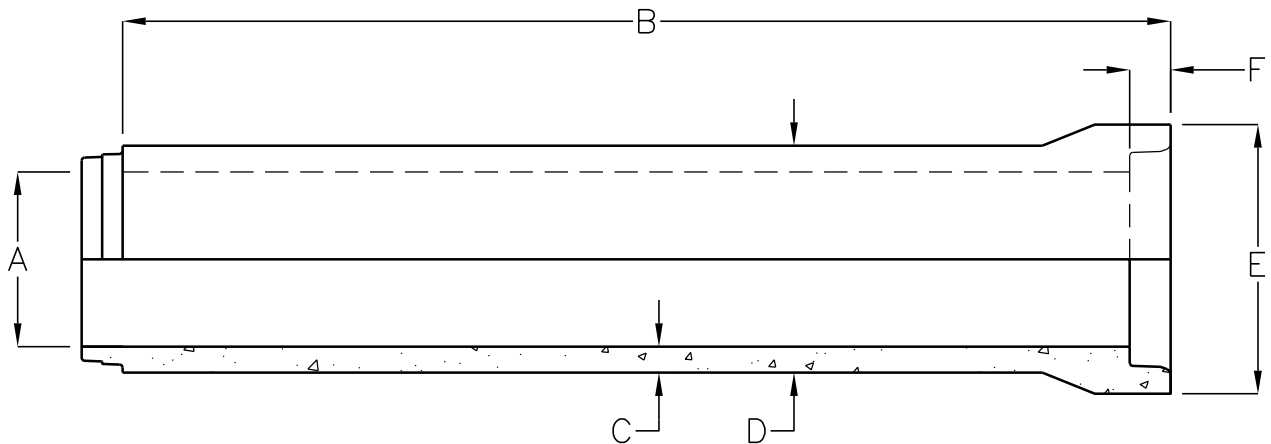

'A' INSIDE DIAMETER	'B' LAYING LENGTH	'C' WALL THICKNESS	'D' BARREL O.D.	'E' BELL O.D.	'F' JOINT DEPTH	WALL TYPE	D-LOAD CLASS	WEIGHT/L.F
15"	7'-6"	2 1/4"	19 1/2"	23 1/8"	3 1/2"	B	3000-V	127 LBS
18"	7'-6"	2 1/2"	23"	26 5/8"	3 1/2"	B	1000-II	168 LBS
18"	7'-6"	2 1/2"	23"	26 5/8"	3 1/2"	B	1350-III	168 LBS
18"	7'-6"	2 1/2"	23"	26 5/8"	3 1/2"	B	2000-IV	168 LBS
18"	7'-6"	2 1/2"	23"	26 5/8"	3 1/2"	B	3000-V	168 LBS
24"	7'-6"	3"	30"	32 5/8"	3 1/2"	B	1000-II	265 LBS
24"	7'-6"	3"	30"	32 5/8"	3 1/2"	B	1350-III	265 LBS
24"	7'-6"	3"	30"	32 5/8"	3 1/2"	B	2000-IV	265 LBS
24"	7'-6"	3"	30"	32 5/8"	3 1/2"	B	3000-V	265 LBS
30"	7'-6"	3 1/2"	37"	39 1/2"	3 1/2"	B	1000-II	384 LBS
30"	7'-6"	3 1/2"	37"	39 1/2"	3 1/2"	B	1350-III	384 LBS
30"	7'-6"	3 1/2"	37"	39 1/2"	3 1/2"	B	2000-IV	384 LBS
30"	7'-6"	3 1/2"	37"	39 1/2"	3 1/2"	B	3000-V	384 LBS

REINFORCED CONCRETE PIPE CONFORMS  
TO ASTM C-76, AASHTO M-170, AASHTO M-198 AND ARIZONA DOT.

FOR COMPLETE DESIGN AND PRODUCT INFORMATION  
CONTACT JENSEN PRECAST.

Jensen Precast reserves the right to make changes to product design  
and/or dimensions without notice. Please contact Jensen Precast whenever  
necessary for confirmation or advice on product design.

**JENSEN**  
PRECAST