TRICO 687 VAULT

6'-0" X 8'-0" X 7'-0"
(INSIDE DIMENSIONS)

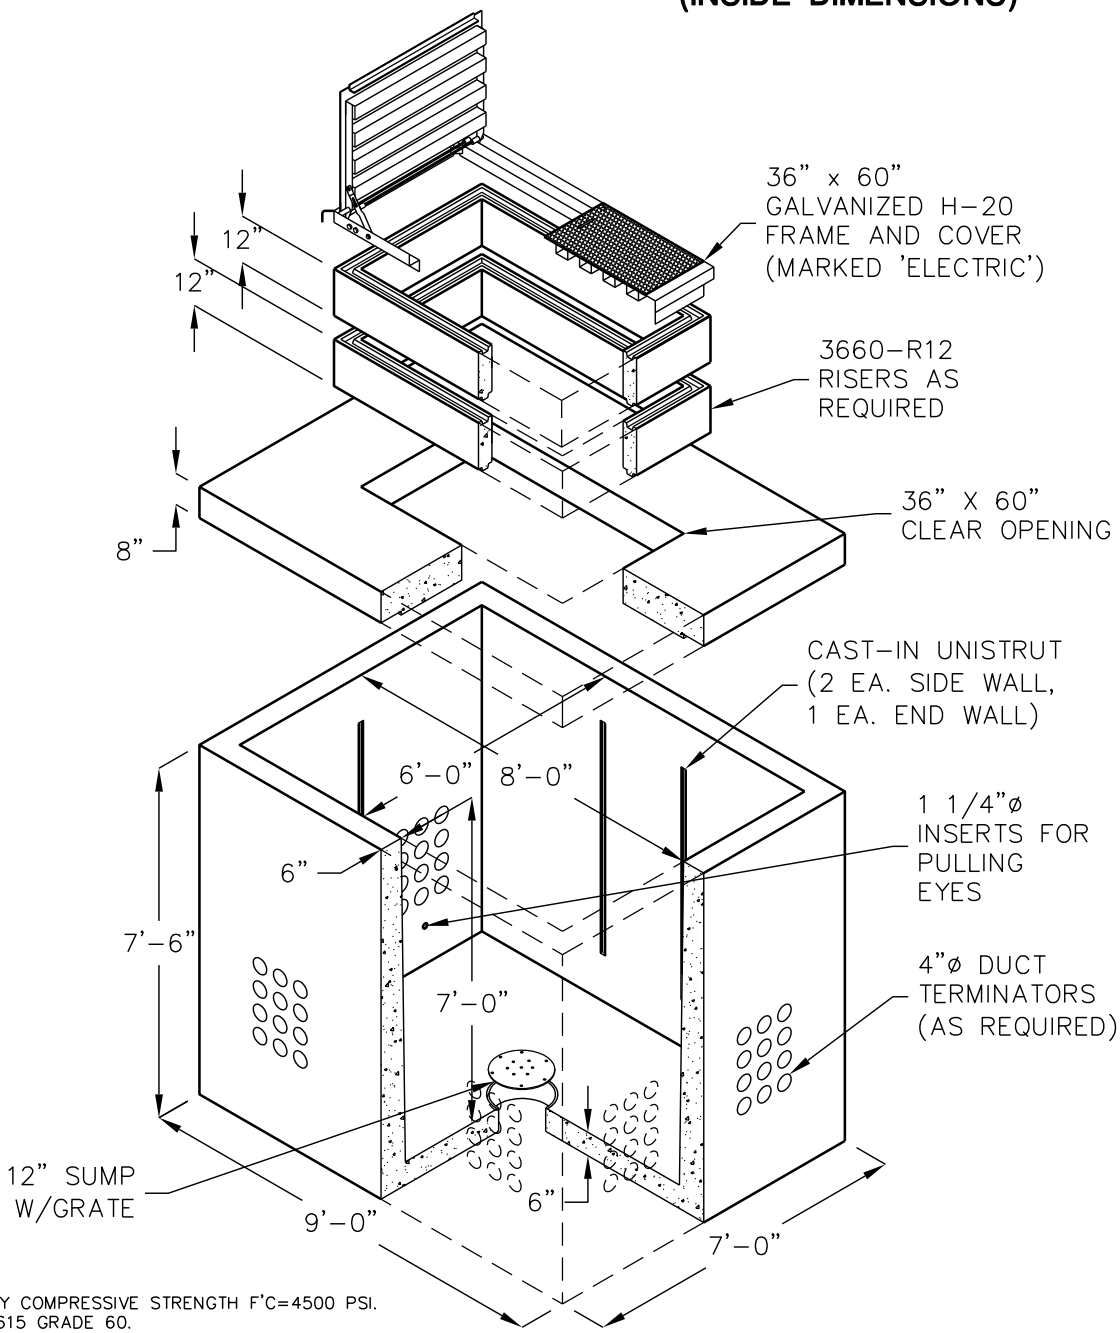

1. CONCRETE: 28 DAY COMPRESSIVE STRENGTH F'C=4500 PSI.
2. REBAR: ASTM A-615 GRADE 60.
3. MESH: ASTM A-185 GRADE 65.
4. DESIGN: ACI-318-99 BUILDING CODE, ASTM C-875 "MINIMUM STRUCTURAL DESIGN LOADING FOR UNDERGROUND PRECAST CONCRETE STRUCTURES"
5. LOADS: HS20-44 W/30% IMPACT PER AASHTO, 80 PSF LATERAL LIVE LOAD SURCHARGE - UP TO 8'-0" DEPTH.
   SOIL: 40 PCF LATERAL SOIL PRESSURE ABOVE WATER TABLE.
   80 PCF LATERAL SOIL PRESSURE BELOW WATER TABLE.
   120 PCF SOIL DENSITY.
6. SOIL COVER: 0' TO 5' (MAX)
7. WATER TABLE: 5'-0" BELOW GRADE.

FOR COMPLETE DESIGN AND PRODUCT INFORMATION
CONTACT JENSEN PRECAST.

4/7/06
687 VAULT_TRICO_B.dwg
© 2006 Jensen Precast

JENSEN PRECAST®