2'–6" x 4'–0" RIVERSIDE TRAFFIC DUCTED PULL BOX x 3'–6" DEEP

NOTES:

- PULL BOX DESIGNED IN ACCORDANCE WITH AASHTO H–20–44 TRAFFIC BRIDGE LOADING USING 5,500 PSI [37–92MPa] COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI [413.2MPa] YIELD STRENGTH ASTM A–706 STEEL REINFORCING PER CALC. #31639.
- COVER DESIGNED FOR H–20–44 TRAFFIC LOADING FOR USE IN OFF–STREET LOCATIONS PER CALC. #31645.
- PULL BOX TO BE PLACED ON A MIN 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.

ORDERING INFORMATION:

K3048–DP42–21T–4 FOR ASSEMBLY AS SHOWN.
TOTAL WEIGHT OF ASSEMBLY IS 2,792 Lbs.

GENERAL NOTES:

1. Minimum soil bearing capacity is hereby assumed to be 2000 PSF unless otherwise documented by a geotechnical report that shall be provided to Jensen Precast by the end user. Jensen Precast shall not be held responsible for the soil bearing capacity.
2. Installation of Manholes, Vaults, Handholes, Meter Boxes etc. will be as per Jensen installation procedures.
3. Structural modification to the Jensen line of products is not permitted without prior written approval from Jensen Engineering Department.
4. Do not scale the drawings, verify all dimensions including rough openings, if any discrepancies are found, notify the Jensen Engineer immediately.
5. The Jensen Engineer will interpret the intent of the drawings in case of possible conflict or discrepancy.
6. Permissible Variations:
   Dimensional Tolerances – The length, width, height, or dia. measurements of the structure when measured on the inside surfaces shall not deviate form design dimensions by more than the following:

Dimensions:	Tolerance:
0 to 5 Feet	1/4"
5 to 10 Feet	3/8"

   10 to 20 Feet as agreed upon between the supplier and purchaser.
7. Squareness Tolerance:
   he inside of the precast concrete component shall be square as determined by diagonal measurements. The difference between such measurements shall not exceed the following:

Measured Length:	Allowable Difference
0 to 10 Feet	1/2"
10 to 20 Feet	3/4"

   20 Feet and over as agreed upon between the supplier and purchaser.

1. PB3048D–B30–05, 30" BOTTOM SECTION. WT. 2,012 Lbs.

1a. PB3048–R6, 6" RISER SECTION. WT. 213 Lbs.
2. PB3048–T6E, 6" TOP SECTION. W/ (F3048–PB–ANG) GALV. CAST IN ANGLE FRAME. WT. 331 Lbs.
3. SC3048–TAL, ONE PIECE TRAFFIC ALUMINIUM COVER, W/ (6) 1/2" x 13" x 2 1/2" SLOTTED S.S. PENTAHEAD BOLTS, (2) 1" DIA. BLIND PICK HOLES, MARKED "RIVERSIDE ELECTRIC". WT. 236 Lbs.
4. 6" x 7" DIA. SUMP x 3" DEEP. LOCATE AS FOLLOWS: BOTTOM SECTION (1) CORE MTD.
5. 14" x 14" DUCTED K.O. x 14" DEEP. DRAFT AS FOLLOWS: T=5", S1=S2=5", B=0". LOCATE AS FOLLOWS: BOTTOM SECTION (2) CORE MTD.
6. 8" x 16" K.O. x 3" DEEP. DRAFTS AS FOLLOWS: T=2", S1=S2=2", B=0". LOCATE AS FOLLOWS: BOTTOM SECTION (4) SHELL MTD.
7. 7/8" DIA. x 9" GALV. VERTICAL PULL IRON. LOCATE AS FOLLOWS: BOTTOM SECTION (2) CORE MTD.
8. ⊕ 1" DIA. BLIND GROUND ROD HOLE. LOCATE AS FOLLOWS: BOTTOM SECTION (2) CORE MTD.
9. ✚ 1/2" PLASTIC INSERT. LOCATE AS FOLLOWS: BOTTOM SECTION (8) CORE MTD.
11. ◎ 1/2" P–36–T INSERT. LOCATE AS FOLLOWS: TOP SECTION (2) CORE MTD., (2) SHELL MTD.
12. ✪ 1/2" P–35–T O.B. INSERT W/CLEAN–OUT HOLE. LOCATE AS FOLLOWS: TOP SECTION (6) FRAME MTD.

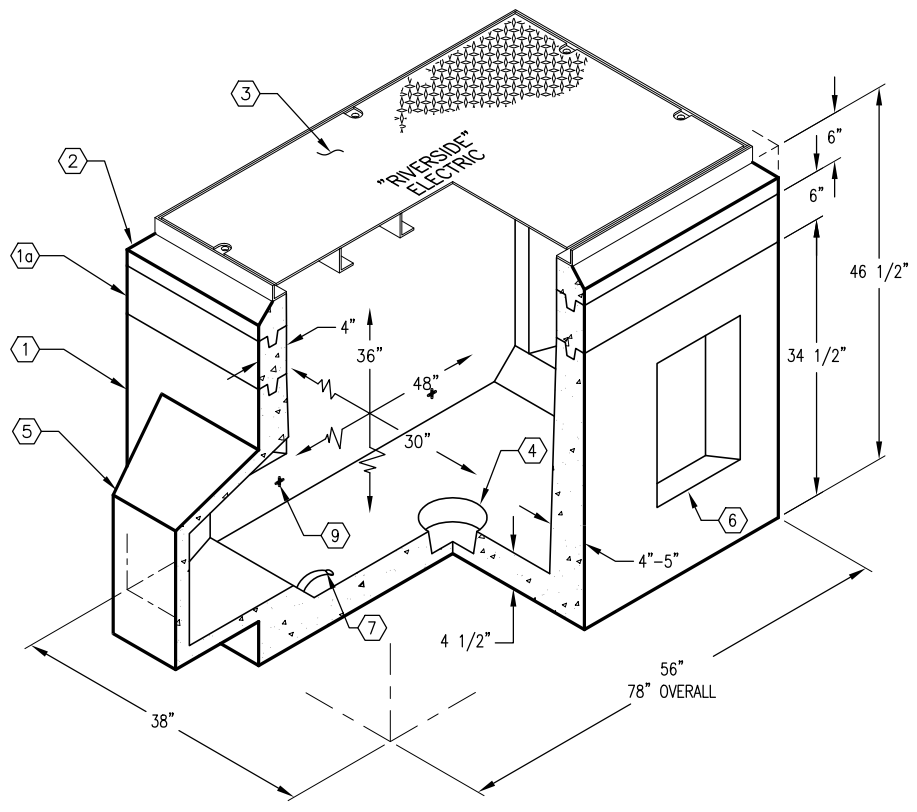

MINIMUM EXCAVATION SIZE:
4'–2" x 7'–6" x DEPTH REQ'D.

JENSEN PRECAST

AUTOCAD REL. 14

K3048–DP42–21T–4
CITY OF RIVERSIDE UCS–302 PR–4 03–01–02

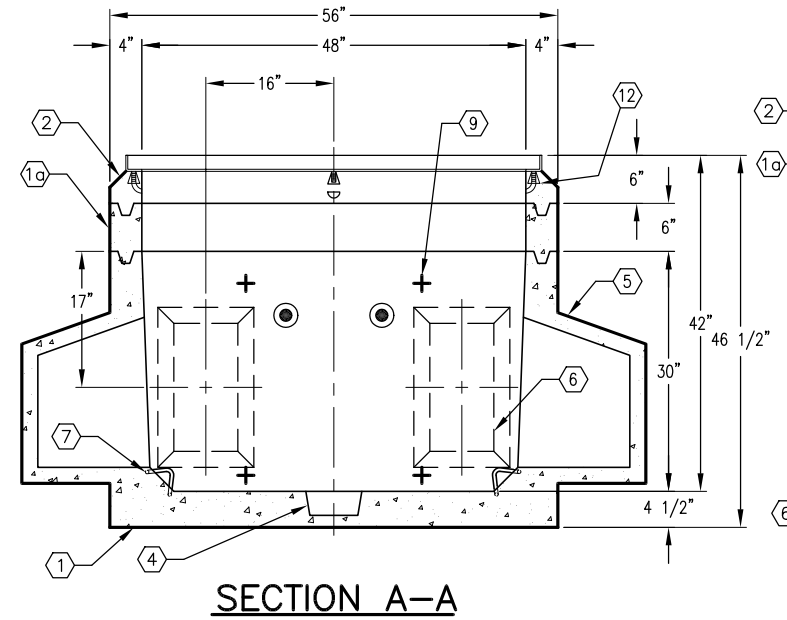

SECTION A–A

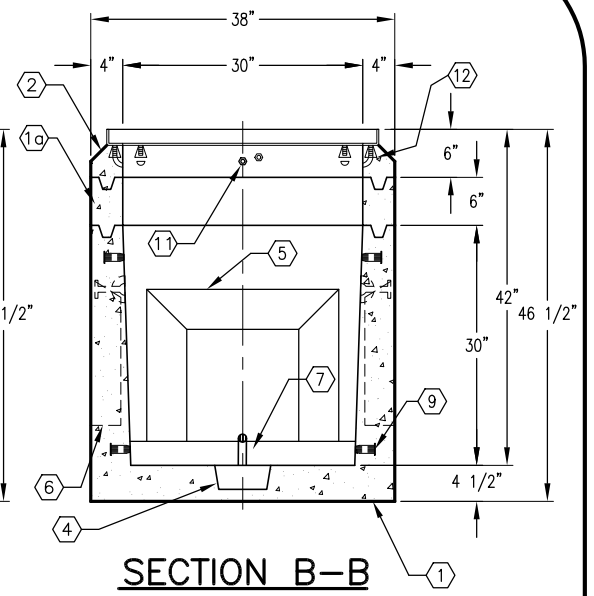

SECTION B–B

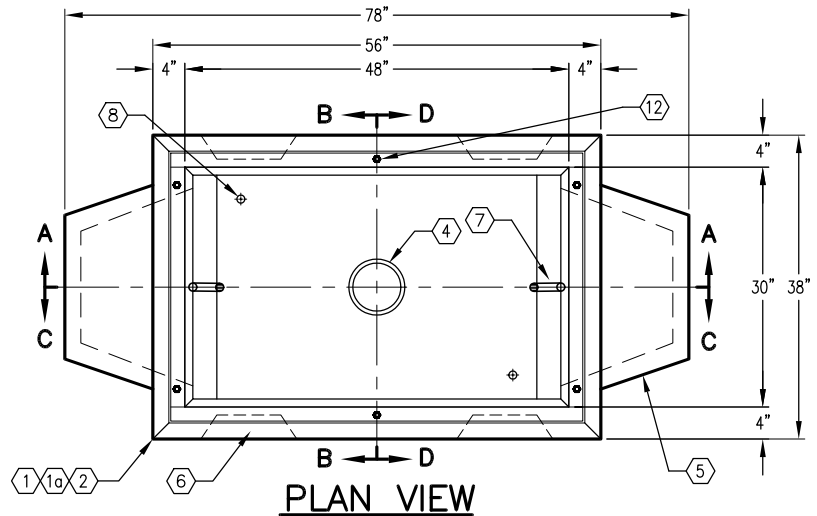

PLAN VIEW

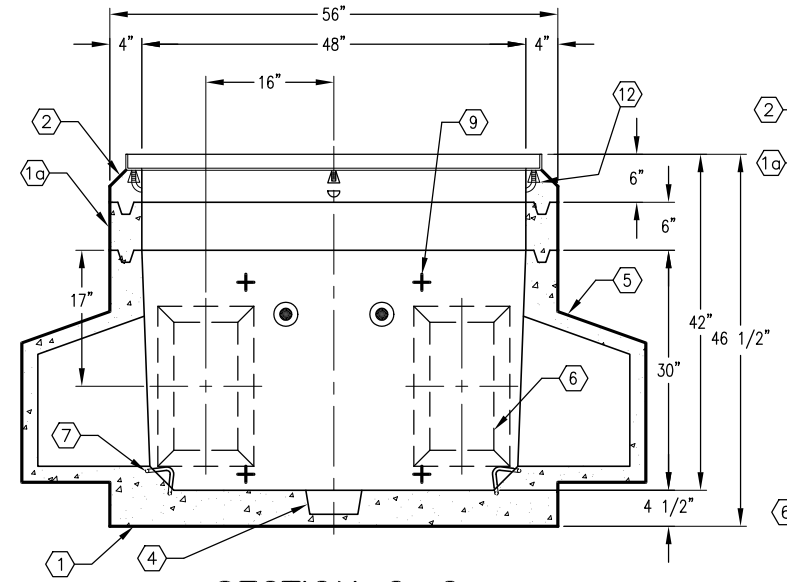

SECTION C–C

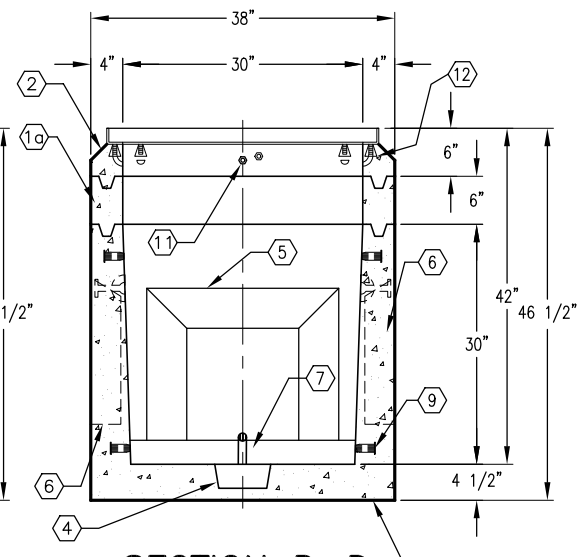

SECTION D–D

JENSEN PRECAST

#	DATE	DESCRIPTION	BY

K3048–DP42–21T–4
CITY OF RIVERSIDE UCS–302 PR–4 03–01–02