4'-0" x 6'-0" EDISON PMH-5 PAD W/2'-6" x 4'-0" ENCLOSURE x 36" DEEP

NOTES:

- VAULT DESIGNED IN ACCORDANCE WITH AASHTO H-20-44 TRAFFIC BRIDGE LOADING USING 5,500 PSI [37.92MPa] COMPRESSIVE STRENGTH CONCRETE AND 60,000 PSI [413.2MPa] YIELD STRENGTH ASTM A-706 STEEL REINFORCEMENT PER CALCS. #30750.
- VAULT TO BE PLACED ON A MIN. 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.
- CONCRETE MIX USED IN POURING THIS PRODUCT SHALL USE FLY ASH AS AN ADMIXTURE.

ORDERING INFORMATION:

K3048-PUV36-11 FOR ASSEMBLY AS SHOWN.
PER EDISON SPEC. UGS 591.1 & 2.
TOTAL WEIGHT OF ASSEMBLY AS SHOWN IS 3,986 Lbs.

1. PB3048D-B36-05 36" BOTTOM SECTION. WT. 2,936 Lbs.
2. PD3048-P-11, 48" x 72" x 6" PMH PAD, WT. 1,050 Lbs.
3. 6" x 7" DIA. SUMP x 4" DEEP. BOTTOM SECTION
4. 24" x 26" DUCTED K.O. x 12" DEEP, DRAFT T=S1=S2=2" B=0", BOTTOM SECTION (2) CORE MTD.
5. 8" x 16" K.O. x 3" DEEP, DRAFT 1 1/2" ALL SIDES BOTTOM SECTION (4) SHELL MTD.
6. 1" DIA. BLIND GROUND ROD HOLE, BOTTOM SECTION (2) CORE MTD.
7. 1 5/8" x 1 5/8" GALV. UNISTRUT x 4", TRANS. PAD (2) TABLE MTD.

GENERAL NOTES:

1. Minimum soil bearing capacity is hereby assumed to be 2000 PSF unless otherwise documented by a geotechnical report that shall be provided to Jensen Precast by the end user. Jensen Precast shall not be held responsible for the soil bearing capacity.
2. Installation of Manholes, Vaults, Handholes, Meter Boxes etc. will be as per Jensen installation procedures.
3. Structural modification to the Jensen line of products is not permitted without prior written approval from Jensen Engineering Department.
4. Do not scale the drawings, verify all dimensions including rough openings, if any discrepancies are found, notify the Jensen Engineer immediately.
5. The Jensen Engineer will interpret the intent of the drawings in case of possible conflict or discrepancy.
6. Permissible Variations:
   Dimensional Tolerances – The length, width, height, or dia. measurements of the structure when measured on the inside surfaces shall not deviate form design dimensions by more than the following:

Dimensions:	Tolerance:
0 to 5 Feet	1/4"
5 to 10 Feet	3/8"

   10 to 20 Feet as agreed upon between the supplier and purchaser.
7. Squareness Tolerance:
   The inside of the precast concrete component shall be square as determined by diagonal measurements. The difference between such measurements shall not exceed the following:
   Measured Length: Allowable Difference

0 to 10 Feet	1/2"
10 to 20 Feet	3/4"

   20 Feet and over as agreed upon between the supplier and purchaser.

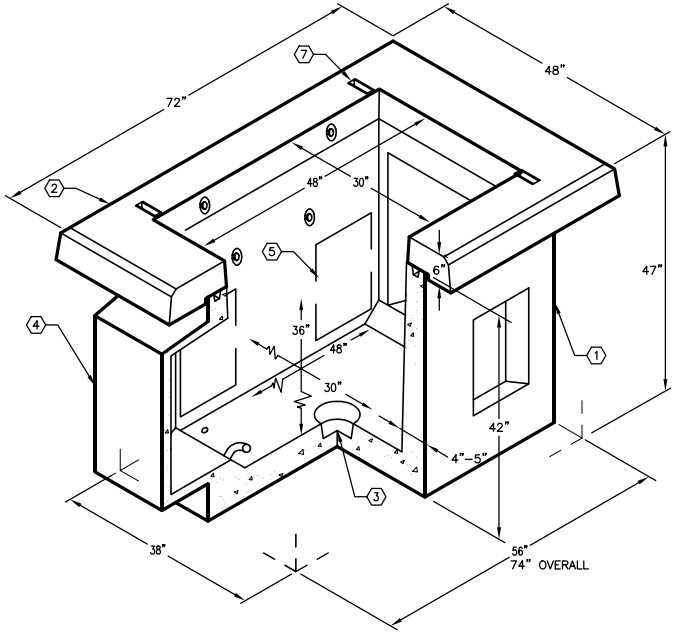

JENSEN PRECAST

AUTOCAD REL. 14

K3048-PUV36-11
PER EDISON SPEC UGS 591.1 & 2 03-01-02

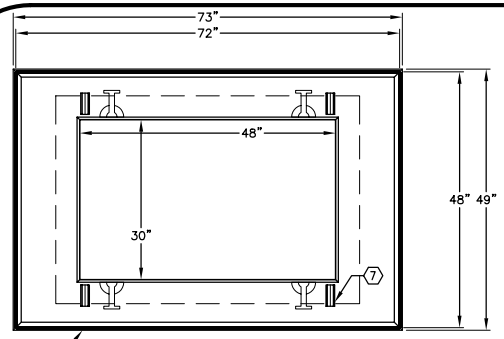

PLAN VIEW OF PAD

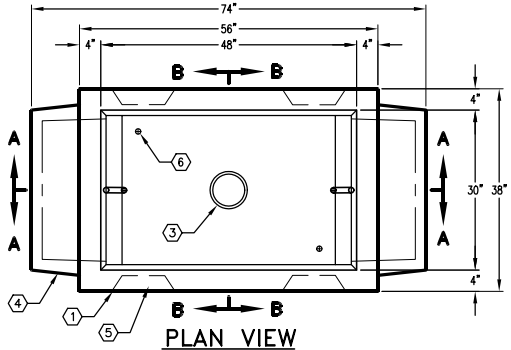

PLAN VIEW

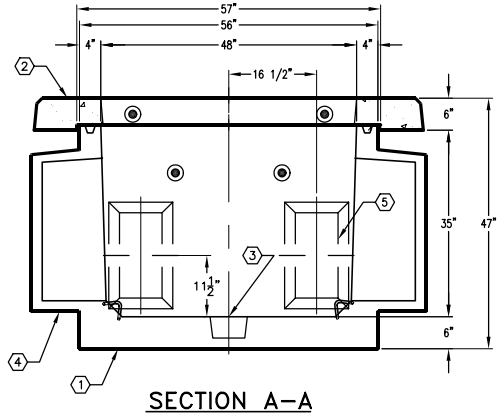

SECTION A-A

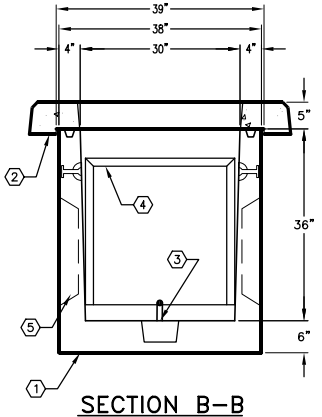

SECTION B-B

JENSEN PRECAST

#	DATE	DESCRIPTION	BY

K3048-PUV36-11
PER EDISON SPEC. UGS 591.1 & 2 03-01-02