


6'-0"x9'-0"x19'-0" AT&T MODULAR MANHOLE

TRAFFIC RATED TUNNEL RACKED AND PAINTED

AT&T OIN: 100061894

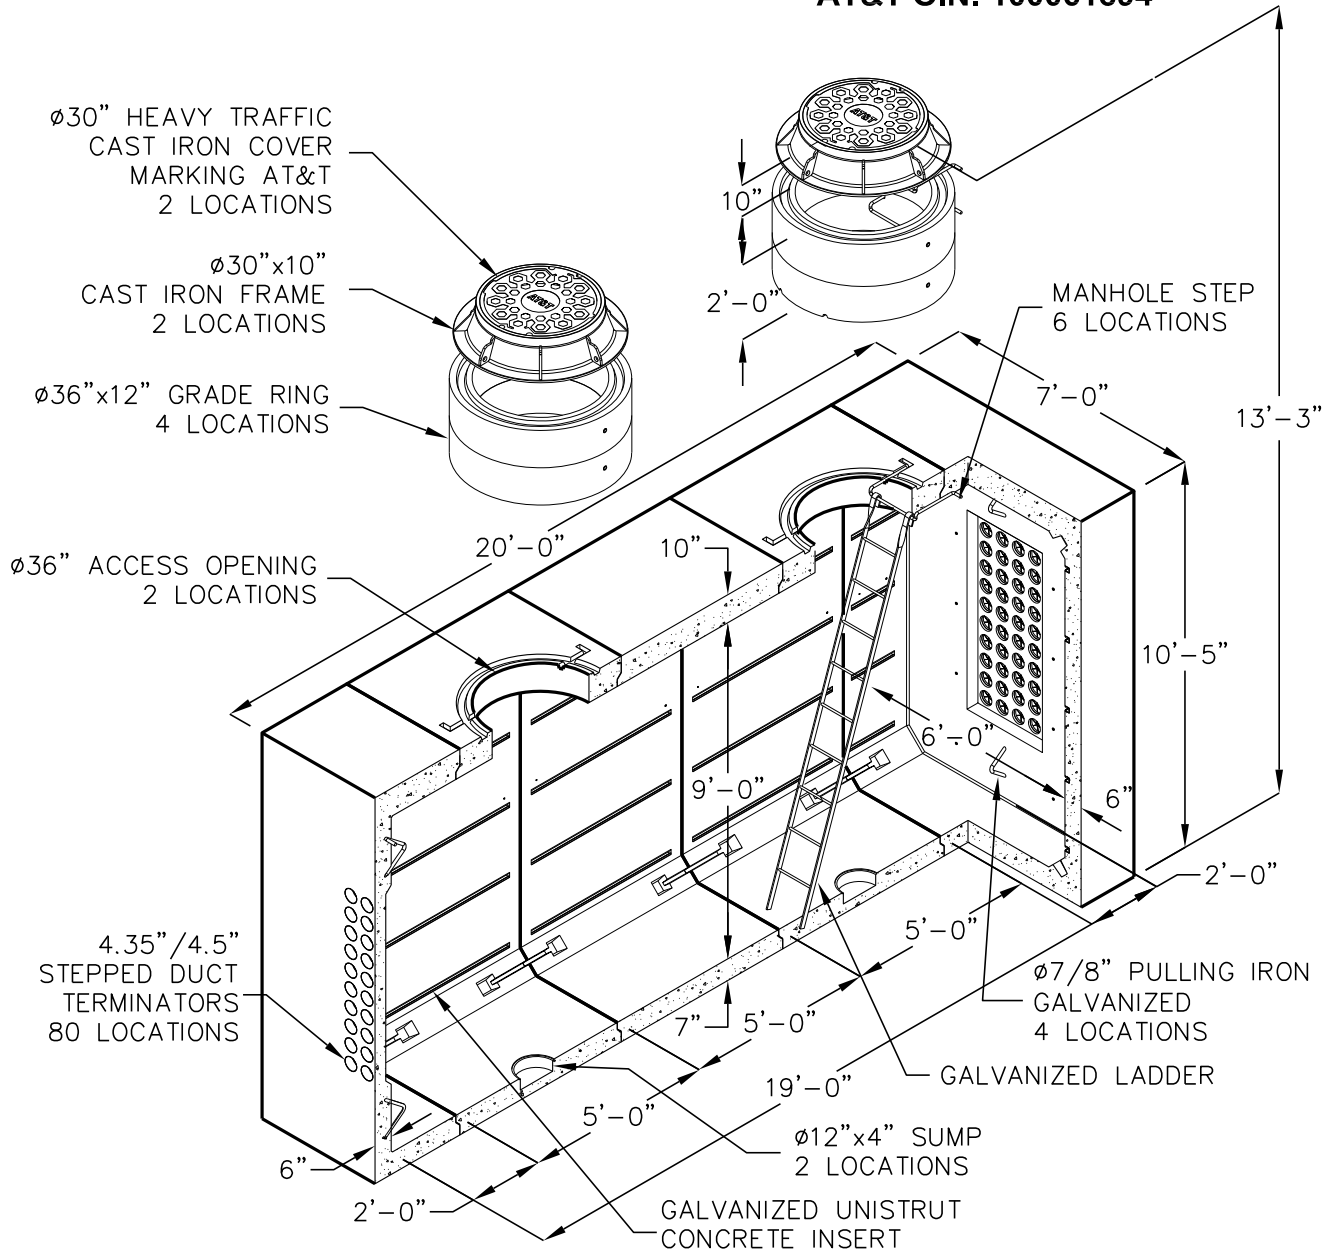

MATERIAL LIST	
DESCRIPTION	WEIGHT (LBS)
6'x9'x5' TUNNEL CENTER WITH RACKING	14,548
6'x9'x5' TUNNEL CENTER WITH ACCESS AND RACKING (2 QTY)	13,831
6'x9'x2' TUNNEL END WITH RACKING - FEMALE KEY	10,999
6'x9'x2' TUNNEL END WITH RACKING - MALE KEY	10,646
36" x 12" GRADE RING (4 QTY)	812
30"x10" HEAVY TRAFFIC CAST IRON FRAME (2 QTY)	359
30" HEAVY TRAFFIC CAST IRON COVER - ATT (2 QTY)	302
GALVANIZED MANHOLE STEP (6 QTY)	7
10'-0" GALVANIZED MANHOLE LADDER	49

G Jensen Precast reserves the right to make changes to product design and/or dimensions without notice. Please contact Jensen Precast whenever necessary for confirmation or advice on product design.