



PART NO.	TUNNEL LENGTHS				
	9'-0"	14'-0"	19'-0"	24'-0"	29'-0"
TV69-END24	● ●	● ●	● ●	● ●	● ●
TV69-CENTER60	●	●	●	●	●
TV69-EXT60		●	●	● ●	△
TV69-EXT60 W/OPEN.			●	●	△

△ UPON CUSTOMER'S REQUEST

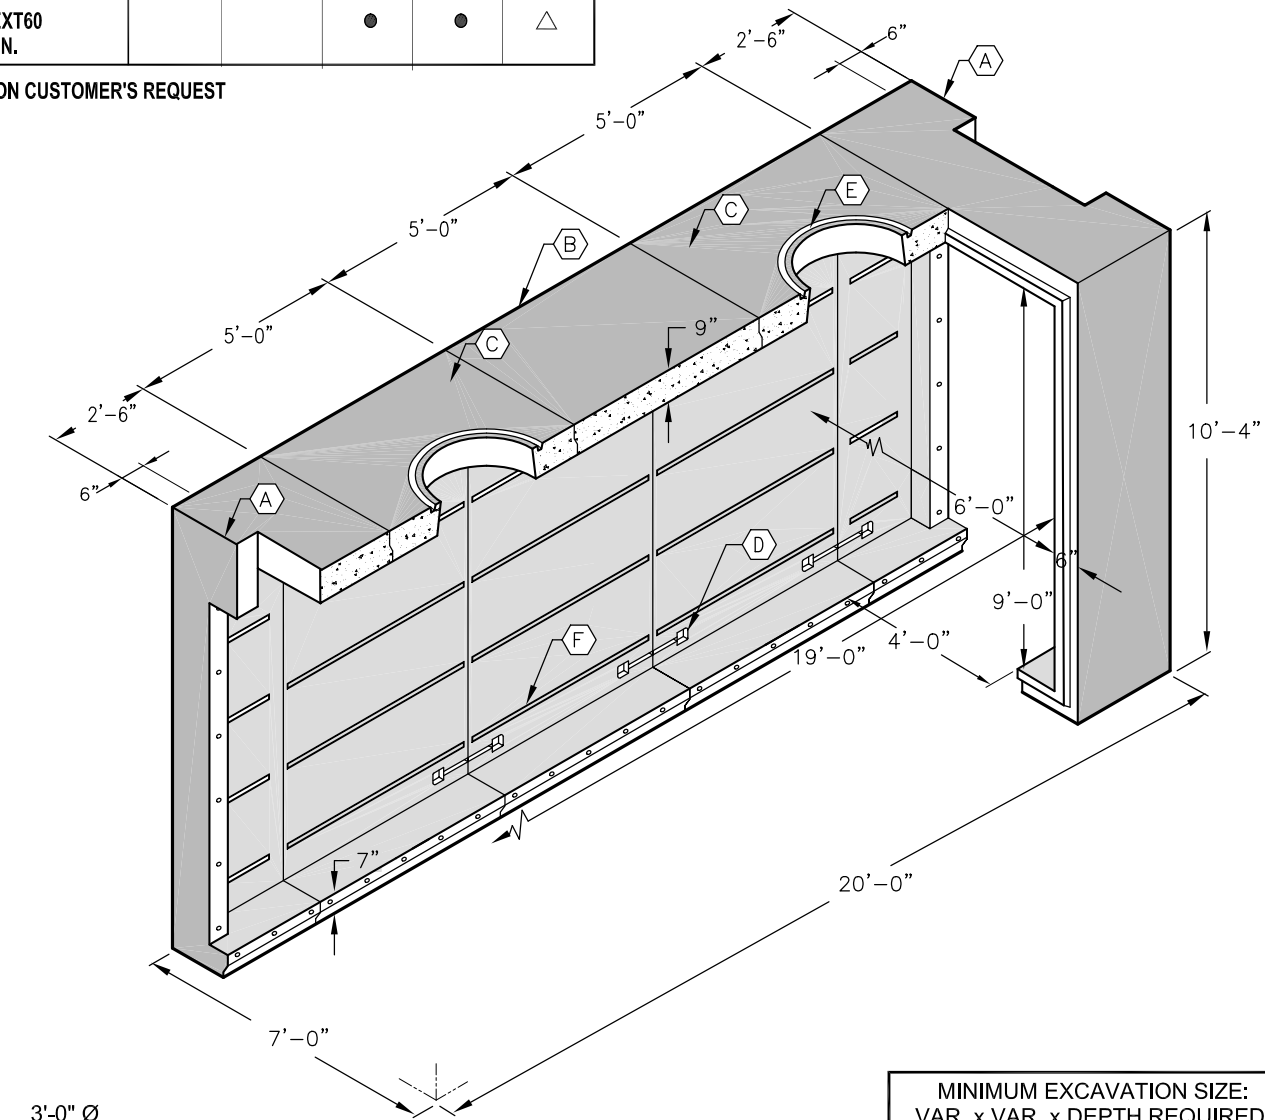

MINIMUM EXCAVATION SIZE:
VAR. x VAR. x DEPTH REQUIRED.



■ ILLUSTRATION IS TYPICAL ONLY OF GENERAL SERIES
CONFIGURATION; FOR SPECIFIC CONFIGURATION,
CALL JENSEN PRECAST.

- (A) END SECTION WT.= 7,200 Lbs.
- (B) INTERMEDIATE SECTION WT.= 12,300 Lbs.
- (C) EXTENSION SECTION W/ OPENING. WT.= 11,300 Lbs.
- (D) BOLT-UP CASTINGS
- (E) FOR COVERS: SEE COVER AND NECKING SECTION.
- (F) UNISTRUT

- DESIGN FOR H-20-44 BRIDGE LOADING.
- ASSEMBLY TO BE PLACED ON A 6" BASE OF CRUSHER RUN FOR EASE OF INSTALLATION AND EVEN LOAD DISTRIBUTION.
- 19'-0" TUNNEL LENGTH SHOWN, OTHER LENGTHS ARE AVAILIABLE.

6'-0" WIDE I.D.
x 9'-0" TALL I.D.
INTERCEPT TUNNEL
MANHOLE

ORG. DWG. DATE
11-15-00

REV. DWG. DATE

JENSEN
PRECAST

TV69-I SERIES