


DESIGNED TO MEET MOST RESIDENTIAL TIMED DOSE APPLICATIONS. CALL JENSEN PRECAST WITH YOUR TRANSPORT PIPE LENGTH, SIZE, AND LIFT TO VERIFY PUMP SELECTION.

PUMP AND LIFT STATION TIMED DOSE-RESIDENTIAL

600 GPD BIOTUBE® EASYPAK™
PUMP PACKAGE

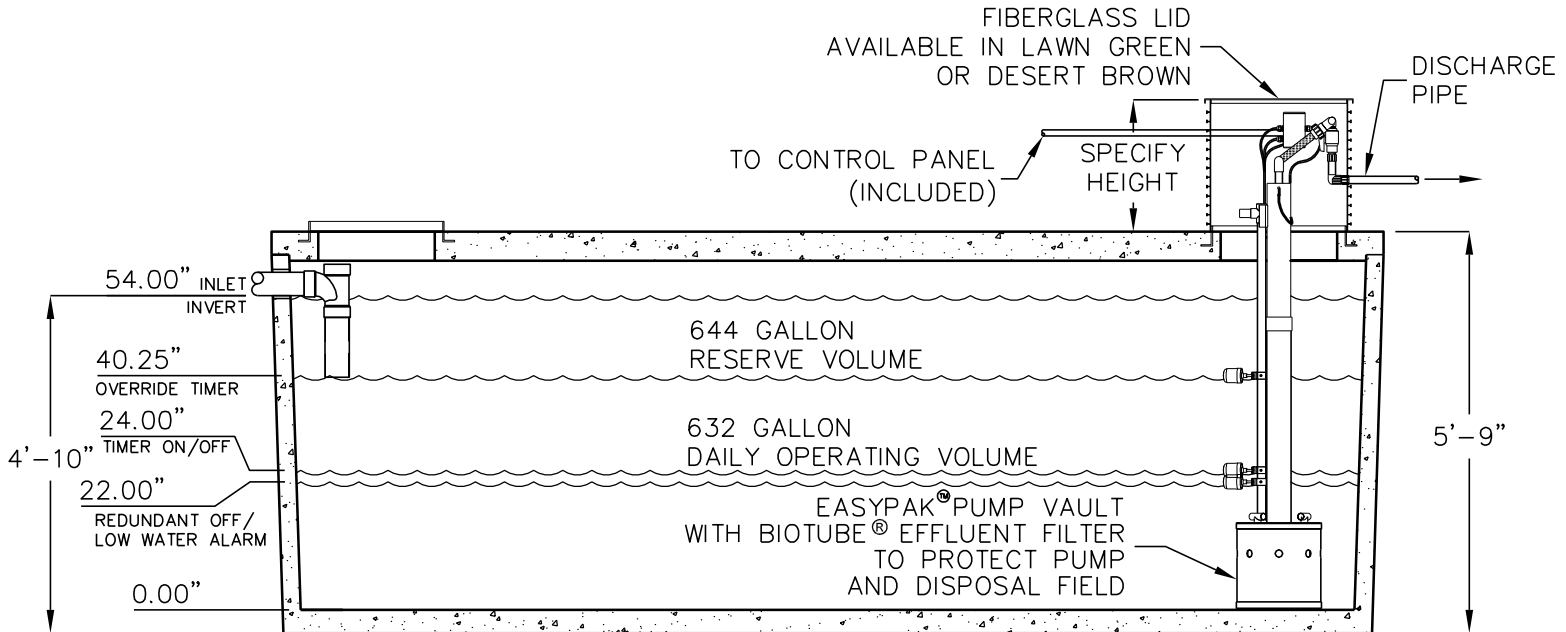

ELEVATION SECTION

- 4" TURBINE EFFLUENT PUMP, WITH 5 YEAR WARRANTY, LASTS FOUR TIMES LONGER THAN CENTRIFUGAL PUMPS.
- FLOATS CAN BE EASILY ADJUSTED TO CHANGE DOSE VOLUME.
- SIMPLEX ELECTRO-MECHANICAL CONTROL PANEL WITH AUDIO AND VISUAL ALARM.
- POWER REQUIREMENTS: 120 VOLT, SINGLE PHASE AT 60 HZ.
- 32 GALLONS PER VERTICAL INCH.
- DESIGN LOAD: NON-TRAFFIC WITH 3 FOOT MAXIMUM SOIL COVER WITH WATER TABLE BELOW BOTTOM OF STRUCTURE. TRAFFIC RATED DESIGNS ARE AVAILABLE.
- FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.

MODEL	DISCHARGE	MAX FLOW RATE
PHS2000-600-10TDA	STANDARD	10
PHS2000-600-10TDA-DB	DRAIN BACK*	10
PAS2000-600-10TDA-CW	COLD WEATHER	10
PHS2000-600-15TDA	STANDARD	15
PHS2000-600-15TDA-DB	DRAIN BACK*	15
PAS2000-600-15TDA-CW	COLD WEATHER	15
PHS2000-600-20TDA	STANDARD	20
PHS2000-600-20TDA-DB	DRAIN BACK*	20
PAS2000-600-20TDA-CW	COLD WEATHER	20
PHS2000-600-30TDA	STANDARD	30
PHS2000-600-30TDA-DB	DRAIN BACK*	30
PAS2000-600-30TDA-CW	COLD WEATHER	30
PHS2000-600-50TDA	STANDARD	65
PHS2000-600-50TDA-DB	DRAIN BACK*	65
PAS2000-600-50TDA-CW	COLD WEATHER	65

*ADJUST TIMER TO INCLUDE TRANSPORT PIPE VOLUME

BIOTUBE® AND EASYPAK® ARE TRADEMARKS OF ORENCO SYSTEMS, INC.

Jensen Precast reserves the right to make changes to product design and/or dimensions without notice. Please contact Jensen Precast whenever necessary for confirmation or advice on product design.

JENSEN
PRECAST