


ARMOR CAST®


AST SPLIT 8000

8,000 GALLON ABOVE
GROUND DUAL PRODUCT
STORAGE TANK


UL2085 PROTECTED TYPE

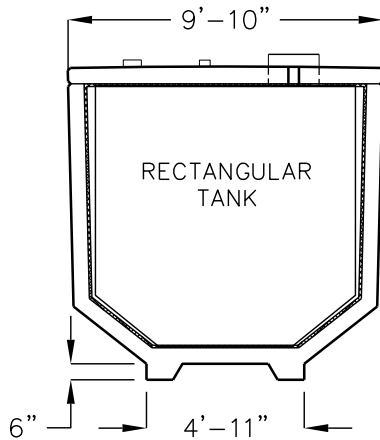


END VIEW

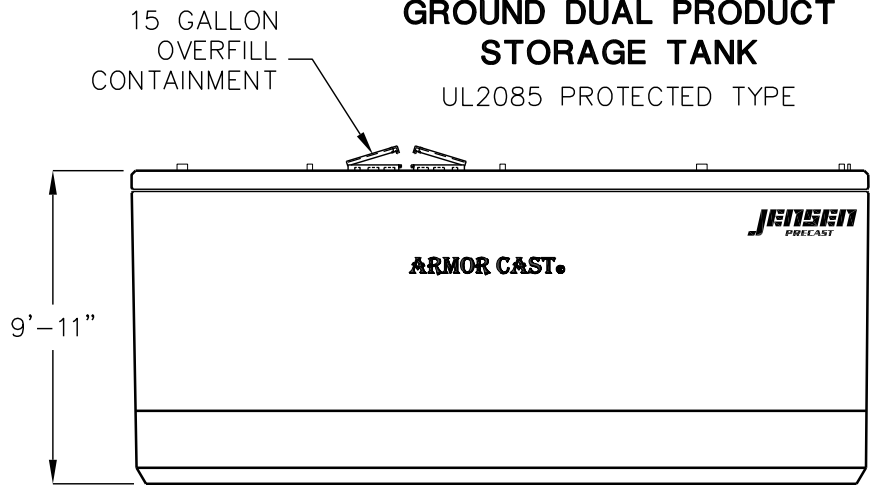


ELEVATION

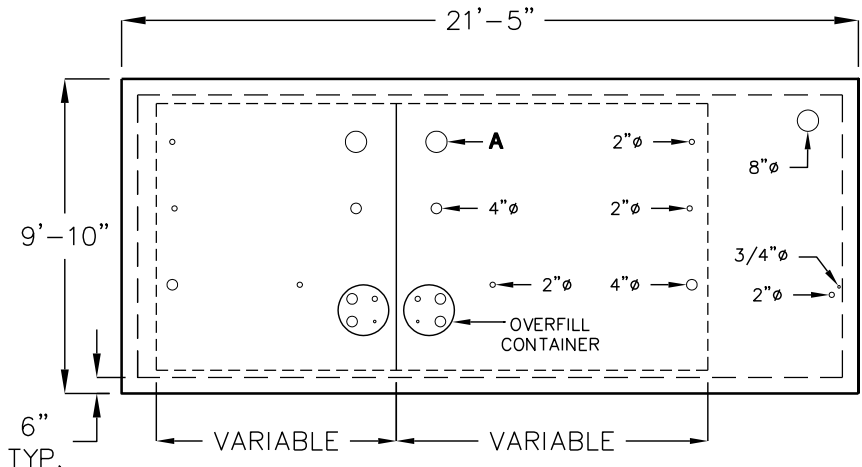

PLAN VIEW

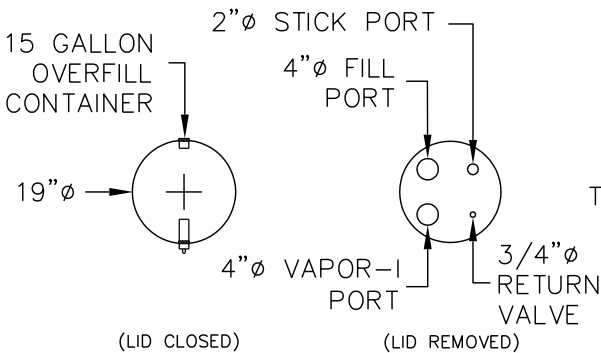

PLAN VIEW

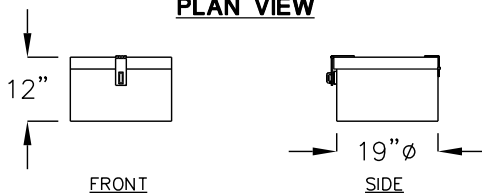

SPILL CONTAINER

(OPTIONAL)

TOTAL CAPACITY	GALLONS	A
8000 GALLONS	4000/4000	8" / 8"
8000 GALLONS	5000/3000	8" / 8"
8000 GALLONS	6000/2000	24" / 6"
8000 GALLONS	7000/1000	24" / 6"

1. RECTANGULAR STEEL TANK IS 1/4" THICK, UL142 LISTED.
2. EXTERIOR FINISH MAY BE EPOXY, EXPOSED AGGREGATE, OR OTHER APPROVED FINISH.
3. APPROXIMATE WEIGHT IS 80,100 LBS.
4. LID IS CROWNED 1/2"± TO FACILITATE DRAINAGE.
5. ALL PIPE NIPPLES ARE SCHEDULE 40, NPT.
6. TOP OF CONCRETE TANK TO RECEIVE NON-SLIP FINISH.
7. 6,000 GAL. AND LARGER TANKS HAVE A 24" DIA. LONG BOLT MANWAY.

FOR COMPLETE DESIGN
AND PRODUCT INFORMATION
CONTACT JENSEN PRECAST.
U.S.A. AND CANADA PATENTED SYSTEM